


Push Fit Ball Valve

Advantages

- Brass construction
- Quick, easy installation
- Can join Copper, CPVC pipe or Pex tubing
- For water application only
- Available in Standard Port Fittings
- 200 PSI at 200°F water
- Certified to ANSI/NSF-61
- Individually Poly-Bagged. Each valve includes tool, pex inserts and installation instructions
- Rust resistant handle with vinyl grip handle

Standard Port	Size	Carton QTY
107-053HC	1/2"	15
107-054HC	3/4"	12
107-055HC	1"	6

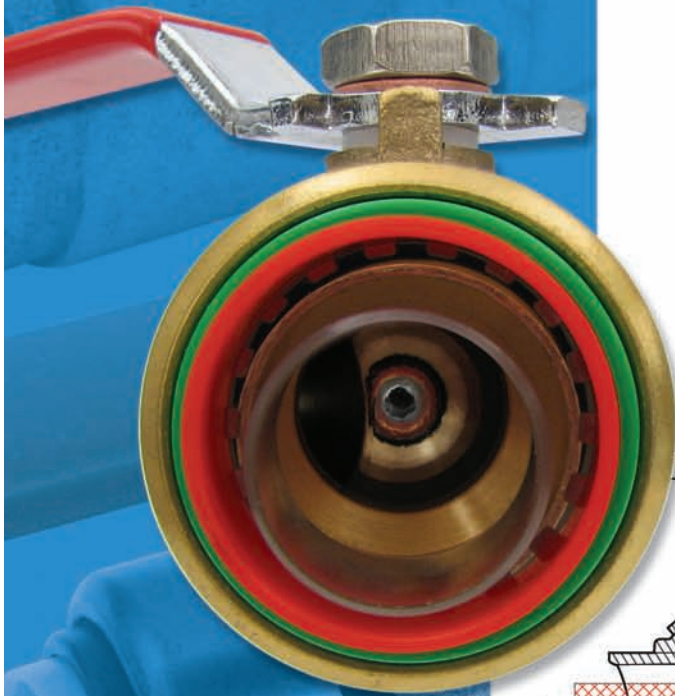

Removable sleeve
for PEX only

